


# Valaire

PARQUET


COLOR:  
**PICARD**

SKU #:  
**18603PP**



**Height:** 3/4"    **Length:** 23-5/8"

*All dimensions are nominal*

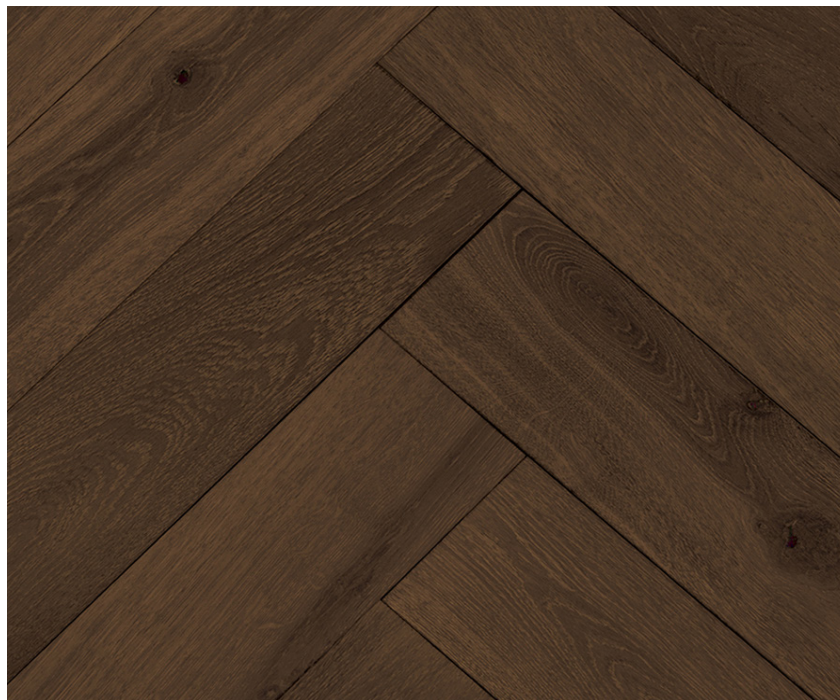

*Your floor may vary due to color treatment, natural tannin variations and knots.*

**Wood Species:**

French White Oak

**Grade:**

Classic

**Construction:**

9-ply hardwood

**Wear Layer:**

3 mm sawn cut, live sawn

**Glue:**

Carb II, TSCA Title 6 EPA certified

**Style:**

Wire brushed, bevel 4-sides, T&G

Fumed and lime-washed colors

**Finish:**

UV-cured Urethane, brush matte, 7 - 10% gloss

Static Friction Coefficient (ASTM D 2047): slip resistance < 0.5

**Warranty:**

25 Years Surface (3-Year Light Commercial), Lifetime Structural

**Coverage:**

7.75 sq ft / carton

**Installation:**

Glue, float or nail with glue assist

**Subfloor:**

Wood, concrete or radiant floor systems

**Radiant Heat:**

Yes, glue down or floating installation > 83° F

ENVIRONMENT: **No harmful VOC, Prop 65 certified, LEED credits**

**CERTIFIED MANUFACTURING:**

- 100% PEFC (PanEuro Forest Council) material  
*100% chain of custody from forest to jobsite*
- Lacey Act compliant
- No halogenated hydrocarbons, herbicides, heavy metals
- No added Urea Formaldehyde, NAF

**GREEN BUILD STATEMENT:**

*Valaire Hardwood Flooring may contribute to attaining points within the Environmental Quality section of the LEED rating system. The determining factor for indoor quality is the quantity of noxious emanations from volatile compounds in adhesives and finishes.*

**TEST RESULTS:**

**Emissions Test:**

CA - DPH specification 01350 (Prop 65): Pass

**Delamination Test:**

ANSI/HPVA Bond Line 3 Cycle Test: 100% Pass

**Critical Radial Flux:**

avg 0.37 w/cm2 ASTM E 648, Class 2 NFPA Life Safety Code 101

**NWFA Janka (Hardness):**

1200 lbs

**Surface Burning:**

ASTM E84 Class C

**Smoke Density:**

Avg.DMC 281-389 Non Flaming ASTM E 662